
# User Manual Flashlight DVR

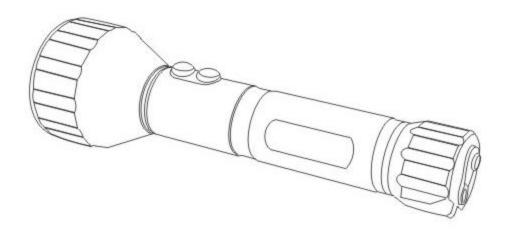


### WELCOME


Thank you for choosing the Flashlight DVR product. So as to operate the recorder more easy and record the nice pictures, please read the User Manual carefully before your using the product.

# PACKING LIST

- ① Flashlight DVR x 1
- O USB Cable x 1
- O Certificate x 1
- Adapter x 1
- S Rope x 1
- © Lithium Battery x1

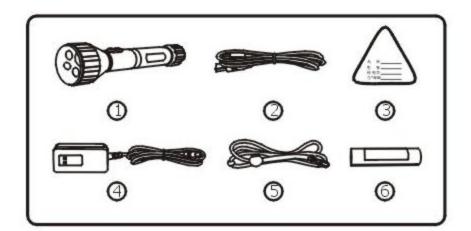

## STRUCTURE

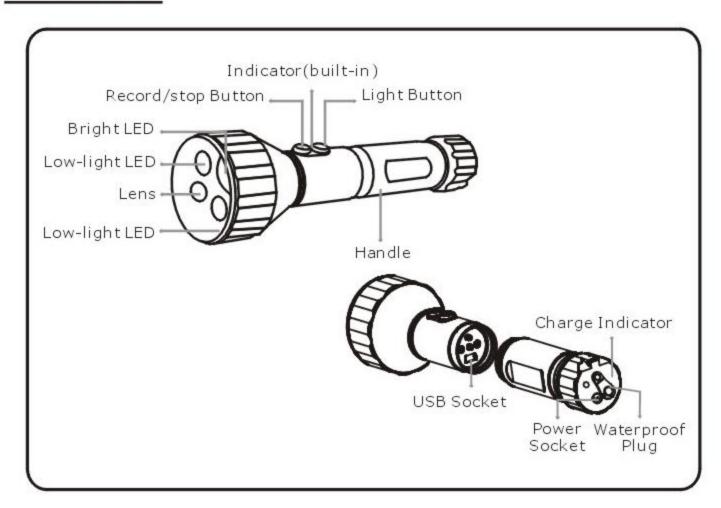


#### DIAGRAM OF OPERATION

## Operating Instructions:

- Press the Light button, Bright LED lights; Press again, Low-light LEDs light; SOS in the third press. LEDs shut off in the fourth press.
- 2. Press the record button for 3 seconds, this is video recording standby mode, the green light continuously.
- A. video:short press "record button" at A time, start video, red light flashing at this time.

Then press again the "recording button", The video recording preservation, return to video recording the standby mode.

B.Take photos: press the "light button" for 3 seconds, the red indicator light continuously.press again the "record button", green lights flashing quickly once and save two photos at the same time. Take pictures under standby mode, long press "light button" for 3 seconds, the green indicator light Continuously, back to video recording mode.



#### Video Output:


- 1. Screw off the handle of flashlight DVR.
- Connect the flashlight DVR to PC directly by USB cable.
- 3. Review the video file on PC.
- If the computer can not play the video file normally, please install the video player


#### Install The Lithium Battery:

- 1. Screw off the flashlight DVR handle.
- Install the Li-battery into handle without polarity.

#### Battery Charge:

- Remove the waterproof plug.
- Connect the power adapter to the Flashlight DVR, the indicator of Flashlight DVR lights on red in charging and turns into green after full charge.





## Date/time Reset:


If you found the date / time of video is not match with the local date/time, please follow the following steps to reset:


The product has the function of real-time display, the date and time will be shown on the image. The format is "Year.month.day. hour. Minutes. seconds". Second". To set or correct the date and time when you use it in the first time in the following steps: Edit a text file according to the format of "Year.month.day. hour. Minutes. seconds". Example"2013:05:10 14:55:30".Connect the product to computer, save the modified file "time.txt" to the root directory of the product memory. Disconnect the product from computer; turn the product on, the time will be set up automatically.

#### Notes:


- If the battery is exhausted, the Indicator(built-in) turns Red light and twinkle, the video files will automatically saved before shut down.
- When the memory is full, press the Record/Stop button, Indicator(built-in) light on blue or will be out after a few seconds, the recording automatically stops.
- 3. The recorder also works as USB disk when connected to a computer.


## **DIRECTION OF ROCORDING INSTRUCTIONS**





Please make sure the button of the flashlight DVR on top during recording, otherwise, video files will do not correctly display.





# **SPECIFICATIONS**

Imaging Sensor	1/4 inch Sony CMOS
Effective Pixels	1 Mega
Camera Lens	5 Mega
View Angle	100°
Video Compression Format	H. 264
View Resolutions	1280*720
Photo Resolutions	2592*1944
Video Frame Rate	30帧/秒
Video Format	AVI
Power Supply	Li-battery(3.7V/2200mAH)
LED Work Time	>4hours
Record Work Time	>8hours
LED and Record Work Time	>3hours
Charge Time	>5hours
Work Voltage	3.3V-4.2V
Operating Temperature	0°C−60°C
Dimensions(W*D*H)	194*56*56 (mm)
Box Size	250*210*70 (mm)
Carton Size	51.5*44*36.5CM